

**MODEL:** CBL-40-UC-UC-1 | **DESCRIPTION:** USB CABLE**FEATURES**

- USB Type C to Type C
- USB 4.0
- TPE jacket
- UL94V-0


**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
USB standard	USB 4.0				
rated voltage			48		Vdc
rated current				5	A
conductor resistance				2	Ω
insulation resistance		100			M Ω
operating temperature		-30		85	$^{\circ}\text{C}$
storage temperature		-40		85	$^{\circ}\text{C}$
flammability rating	UL94V-0				
RoHS	yes				

MECHANICAL DRAWING

units: mm
 tolerance:
 X.X ±0.15 mm
 X.XX ±0.10 mm
 unless otherwise noted

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
1	cable	{[30#1C+S+C/PET+HM]*8C+[32#1P+A]+[34#1C+CU/PET+HM]*3C+34#1C+26#2C+E[28#]*2PCS+NON-WOVEN+B}*1C WITH TPE JACKET OD=4.8 mm	black
2	type c plug 2	with PCBA and e-marker	
3	type c plug 1	with PCBA and without e-marker	
4	inner mold	PE	
5	over mold	TPE (UL94V-0)	black

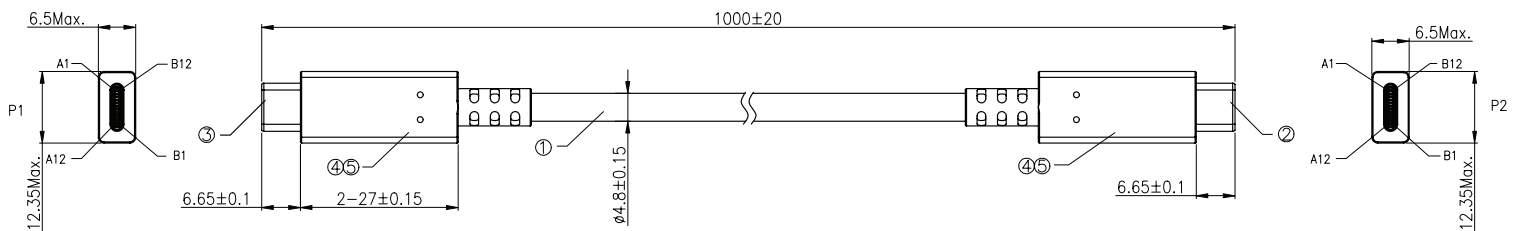

PIN ASSIGNMENT

P2	SIGNAL NAME		P2	SIGNAL NAME
A1,B1,A12,B12	GND	— E-MARKER —	A1,B1,A12,B12	GND
A4,B4,A9,B9	VBUS		A4,B4,A9,B9	VBUS
A5	CC		A5	CC
B5	VCONN		B5	VCONN
A6	DP1		A6	DP1
A7	DN1		A7	DN1
A2	SSTXP1		B11	SSRXP1
A3	SSTXN1		B10	SSRXN1
B11	SSRXP1		A2	SSTXP1
B10	SSRXN1		A3	SSTXN1
B2	SSTXP2		A11	SSRXP2
B3	SSTXN2		A10	SSRXN2
A11	SSRXP2		B2	SSTXP2
A10	SSRXN2		B3	SSTXN2
A8	SBU1		B8	SBU1
B8	SBU2		A8	SBU2
B6	N.C		B6	N.C
B7	N.C		B7	N.C
SHELL			— BRAID —	SHELL

REVISION HISTORY

rev.	description	date
1.0	initial release	08/23/2023
1.01	CUI Devices rebranded to Same Sky	09/12/2024

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[sameskydevices.com](https://www.sameskydevices.com)