same sky

Additional Resources: Product Page

date 09/12/2024

page 1 of 3

SERIES: CDM1209 | DESCRIPTION: M12 CONNECTOR

FEATURES

- M12 male connector
- A & D code versions
- · panel mount
- IP67







SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
	3 & 4 pole models			250	V
rated voltage	5 pole model			60	V
	8 & 12 pole models			30	V
	3, 4, & 5 pole models			4	Α
rated current	8 pole model			2	Α
rated current withstanding voltage contact resistance insulation resistance insertion/withdrawal force operating temperature life safety approvals flammability rating	12 pole model			1.5	Α
withstanding voltage	for 1 minute		1,500		Vac
contact resistance				10	mΩ
insulation resistance	at 500 Vdc for 1 minute	100			МΩ
insertion/withdrawal force		0.3		3.0	kgf
operating temperature		-25		80	°C
life		100			cycles
safety approvals	compliant with IEC61076-2-101				
flammability rating	see material table				
RoHS	yes				
IP level	IP67 (in mated condition)				
	tray QTY: 30 pcs				
packaging	carton size: 275 x 235 x 335 mm				
	carton QTY: 450 pcs				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 3 seconds	260	280	300	°C

PART NUMBER KEY

CDM1209 - XXX - MP - F12 - 67

Base Number

No. of Poles

03A = 3 (A-Coding)

04A = 4 (A-Coding)

O4D = 4 (D-Coding)

05A = 5 (A-Coding)


08A = 8 (A-Coding) 12A = 12 (A-Coding)

sameskydevices.com

MECHANICAL DRAWING

units: mm tolerance: $0.5<X\le6.0$: ±0.1 mm $6.0<X\le30.0$: ±0.2 mm unless otherwise noted

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
Α	M12x1.0 screw	brass	nickel
В	terminals; male	brass	gold
С	housing; male	PA66 (UL94V-0)	black
	M12x1.0 nut	brass	nickel
E	resin	epoxy resin	black
F	o-ring	FKM	black

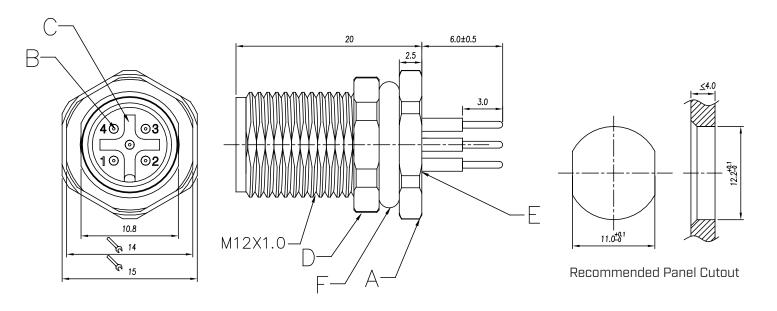

No. of Poles	3	4	4	5	8	12
Coding	A-Coding	4 • • 3 1 • • 2 A-Coding	D-Coding	4 • 3 • 5 1 • • 2 A-Coding	A-Coding	A-Coding
Pin Diameter	1.0 mm	1.0 mm	1.0 mm	1.0 mm	0.8 mm	0.6 mm
Recommended PCB Layout Top View	55. 0 4 1 3 0123	55. 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	55. 0 4 3 61.2vA 51. 0 0	55 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	76 05 01 10 00 00 00 00 00 00 00 00 00 00 00	#5.8 % 2 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

REVISION HISTORY

rev.	description	date	
1.0	initial release	12/13/2021	
1.01	logo, datasheet style update	08/05/2022	
1.02	added D-Code model	05/09/2024	
1.03	CUI Devices rebranded to Same Sky	09/12/2024	

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.