

Additional Resources: Product Page

date 09/11/2024

page 1 of 5

MODEL: CMS-181637-158SP-X8 | DESCRIPTION: SPEAKER

### **FEATURES**

- IPX8 rated
- rated 1.5 W
- $\cdot$ 8 $\Omega$







#### **SPECIFICATIONS**


input power max power: as per IEC-268-5, in 1 cc box impedance at 2.0 kHz, 3.46 Vrms  coil resistance resonant frequency (Fo) at 3.46 Vrms, 10 cm in 1 cc box  frequency response sound pressure level at 3.46 Vrms, 10 cm, avg 1.0, 1.5, 2.0 kHz, 1 cc box  distortion at 2.0 kHz, 3.46 Vrms, 10 cm in 1 cc box	6.8 6.48 880 Fo	1.5 8 7.2 1,100	1.7 9.2 7.92	W Ω
coil resistance resonant frequency (Fo) at 3.46 Vrms, 10 cm in 1 cc box frequency response sound pressure level at 3.46 Vrms, 10 cm, avg 1.0, 1.5, 2.0 kHz, 1 cc box	6.48	7.2	-	
resonant frequency (Fo) at 3.46 Vrms, 10 cm in 1 cc box frequency response sound pressure level at 3.46 Vrms, 10 cm, avg 1.0, 1.5, 2.0 kHz, 1 cc box	880		7.92	0
frequency response sound pressure level at 3.46 Vrms, 10 cm, avg 1.0, 1.5, 2.0 kHz, 1 cc box		1,100		22
sound pressure level at 3.46 Vrms, 10 cm, avg 1.0, 1.5, 2.0 kHz, 1 cc box	Fo		1,320	Hz
			20,000	Hz
distortion at 2.0 kHz. 3.46 Vrms. 10 cm in 1 cc box	97	100	103	dB
, , , , , , , , , , , , , , , , , , , ,			10	%
buzz, rattle, etc. must be normal at sine wave, 0.2~ 2 kHz in 1 cc box			3.46	V
polarity cone moves forward w/ positive dc current to "+" termina	I			
dimensions 18 x 16 x 3.7				mm
magnet Nd-Fe-B				
frame material PPA				
cone material PEEK				
terminal solder pads				
weight	3.0	3.5	4.0	g
operating temperature	-20		60	°C
storage temperature	-20		70	°C
hand soldering for maximum 3 seconds			380	°C
RoHS yes			-	
IP level IPX8 (front side)				


Notes: 1. All specifications measured at 15~35°C, humidity at 25~75%, under 86~106 kPa pressure, unless otherwise noted.


## **MECHANICAL DRAWING**

units: mm

tolerance: ±0.2 mm








# **RESPONSE CURVES**


## **Frequency Response Curve**

Test Conditions: 3.46 Vrms / 10 cm in 1 cc box

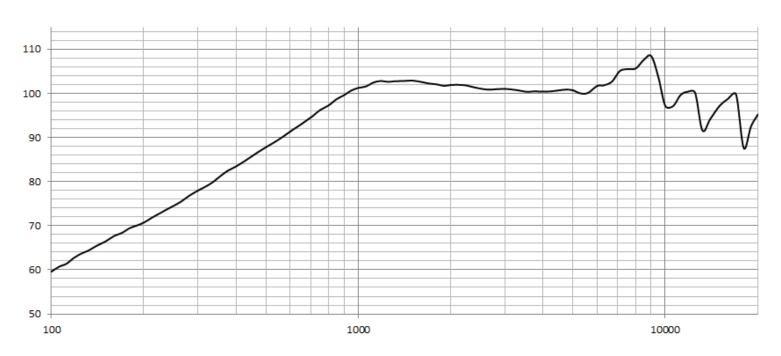

#### **Total Harmonic Distortion Curve**


Test Conditions: 3.46 Vrms / 10 cm in 1 cc box

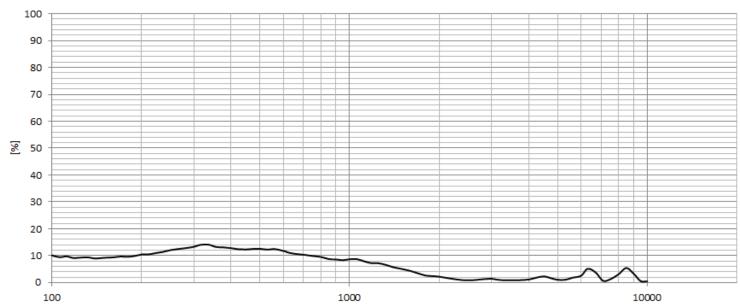

## **PACKAGING**

units: mm

Tray QTY: 56 pcs per tray Carton Size: 470 x 300 x 310 mm Carton QTY: 2,800 pcs per carton

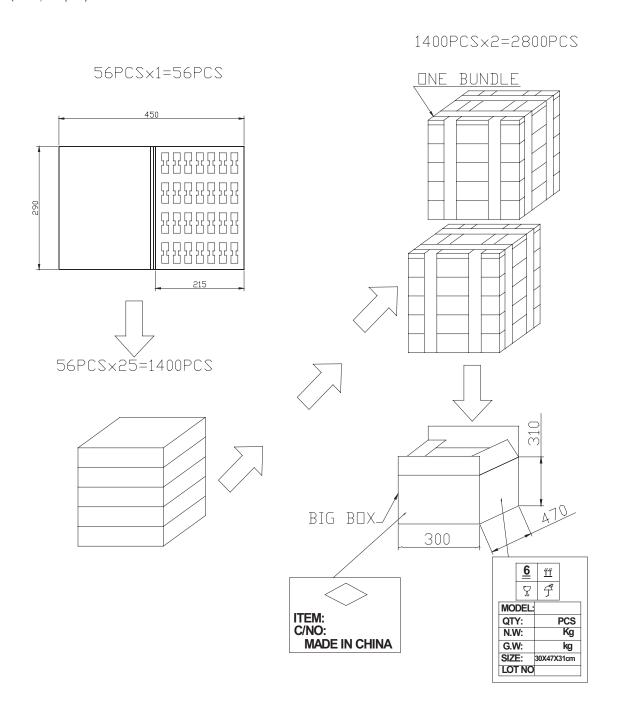

Additional Resources: Product Page

SAME SKY | MODEL: CMS-181637-158SP-X8 | DESCRIPTION: SPEAKER

**date** 09/11/2024 | **page** 5 of 5

### **REVISION HISTORY**

rev.	description	date
1.0	initial release	03/22/2023
1.01	CUI Devices rebranded to Same Sky	09/11/2024

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.