

Additional Resources: Product Page

date 09/11/2024

page 1 of 4

MODEL: CPT-2207-90T | DESCRIPTION: PIEZO BUZZER TRANSDUCER

FEATURES

- piezo
- 90 dB @ 10 cm
- through hole





SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage	Vp-p ↑		5		Vp-p
operating voltage	0V			30	Vp-p
current consumption	at rated voltage			1.5	mA
rated frequency		3,500	4,000	4,500	Hz
sound pressure level	at 10 cm, rated voltage	90			dB
electrostatic capacitance	at 120 Hz	17,500	25,000	32,500	pF
dimensions	Ø22 x 8.5				mm
weight			2.4		g
material	PBT (UL94HB)				
terminal	pin (tin platied brass)				
operating temperature		-20		100	°C
storage temperature		-30		110	°C
washable	no				
RoHS	yes				
ROHS	yes				

1. All specifications measured at 25±2°C, humidity at 45-60%, unless otherwise noted.


SOLDERABILITY


parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 5 seconds	330	350	370	°C
wave soldering	for maximum 5 seconds	255	260	265	°C


MECHANICAL DRAWING

units: mm

tolerance: ±0.5 mm




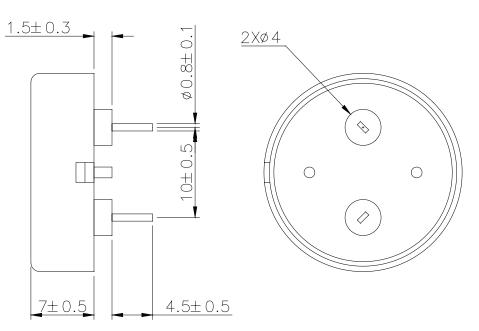



Recommended PCB Layout Top View

FREQUENCY RESPONSE CURVE

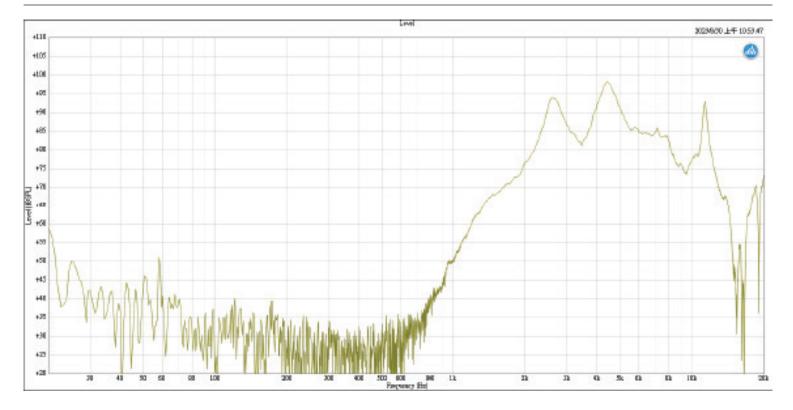

Additional Resources: Product Page

REVISION HISTORY

rev.	description	date	
1.0	initial release	09/13/2022	
1.01	CUI Devices rebranded to Same Sky	09/11/2024	

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.