Additional Resources: Product Page



date 09/12/2024 page 1 of 3

MODEL: HSB44-606010P | DESCRIPTION: HEAT SINK

FEATURES

- BGA design
- push pins
- aluminum alloy
- clean finish





MODEL	thermal resistance ¹				power dissipation ¹
	@ 75°C ΔT, nat conv (°C/W)	@ 1 W, nat conv (°C/W)	@ 1 W, 200 LFM (°C/W)	@ 1 W, 400 LFM (°C/W)	@ 75°C ∆T, nat conv (W)
HSB44-606010P	10.09	10.6	2.7	1.7	7.43

160

Note: 1. See performance curves for full thermal resistance details.

PERFORMANCE CURVES

	Heatsink Temperature Rise Above Ambient (ΔT = Ths - Ta) (°C)			
Power (W)	Natural Conv.	200 LFM	400 LFM	
0	0	0	0	
1	10.6	2.7	1.7	
2	20.6	5.0	3.1	
3	30.5	7.5	4.7	
4	42.3	10.1	6.3	
5	52.1	12.6	7.9	
6	61.9	15.4	9.6	
7	71.5	18.0	11.3	
8	80.2	20.8	13.0	
9	89.1	23.7	14.7	
10	97.8	26.4	16.3	
11	105.2	29.2	17.9	
12	112.7	32.0	19.6	
13	121.5	34.8	21.4	
14	128.3	37.5	23.0	
15	135.5	40.3	24.8	

Mounting Surface Temperature Rise Above Ambient (°C) Without Airflow 140 200 LFM 120 400 LFM 100 80 60 40 20 0 0 2 4 6 8 10 12 14 16 Heat Dissipated (W)

.....

Ths: "hot spot" temperature measured on the heatsink Ta: ambient temperature

.....


MECHANICAL DRAWING


units: mm tolerance: ±0.50 mm

.....

MATERIAL	AL 6063-T5
FINISH	clean
PUSH PIN	nylon 66
SPRING	spring steel, zinc plated
WEIGHT	50 g

.....

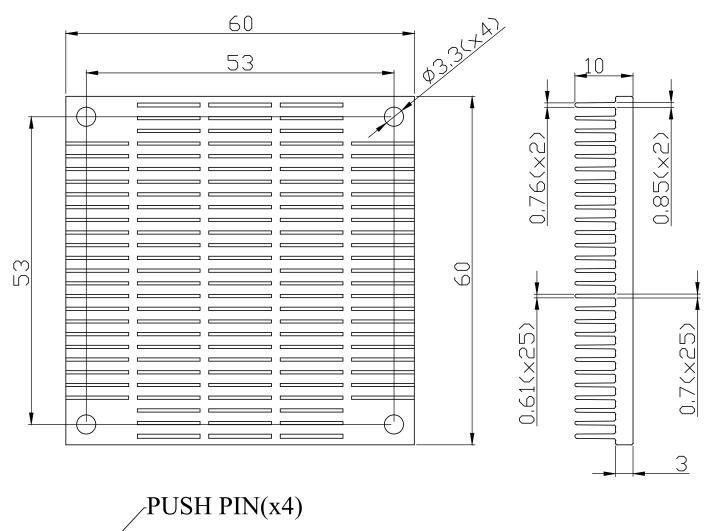

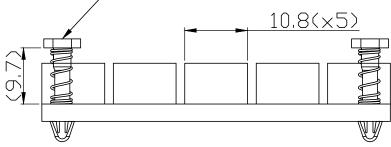

REVISION HISTORY

rev.	description	date
1.0	initial release	03/01/2024
1.01	CUI Devices rebranded to Same Sky	09/12/2024

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

same sky

.....

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.