

Additional Resources: Product Page

date 02/26/2025

page 1 of 5

MODEL: NSIM-12-A | DESCRIPTION: NANO SIM CARD CONNECTOR

FEATURES

- · nano SIM card connector
- push in, auto eject out
- · card detect switch
- surface mount
- 7 pin
- 1.24 mm profile






SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|---------------------------------|---|-------|-------|-----|--------|
| rated voltage | | | - | 30 | V |
| rated current | | | - | 0.5 | А |
| contact resistance ¹ | | | | 100 | mΩ |
| insulation resistance | at 500 Vdc, between adjacent circuits | 1,000 | | | МΩ |
| voltage withstand | for 1 minute, between adjacent circuits | | 500 | | Vdc |
| insertion force | at a rate of 25 mm/min | | | 10 | N |
| withdrawal force | at a rate of 25 mm/min | 0.5 | | | N |
| life | | | 5,000 | | cycles |
| operating temperature | | -40 | | 85 | °C |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |

Note: 1. When measured at 20 mV / 100 mA.

SOLDERABILITY


| parameter | conditions/description | min | typ | max | units |
|------------------|--|-----|-----|-----|-------|
| reel storage | at relative humidity 40~70% reel opened: use within 1 month reel unopened: up to 15 month shelf life | 16 | 22 | 28 | °C |
| reflow soldering | see reflow profile | | | 250 | °C |

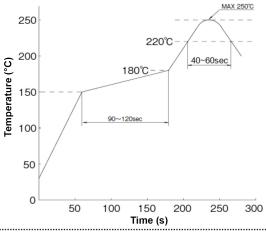

MECHANICAL DRAWING

units: mm tolerance: X.X ±0.30 mm X.XX ±0.20 mm X.XXX ±0.10 mm unless otherwise specified

| DESCRIPTION | MATERIAL | PLATING/COLOR |
|-------------------|---------------------------|---|
| housing | LCP (UL94V-0) | black |
| contact terminals | copper alloy t=0.08 mm | contact area: gold flash over nickel solder area: gold flash over nickel |
| shell | SUS304 t=0.10 mm | contact area: gold flash over nickel solder area: gold flash over nickel |

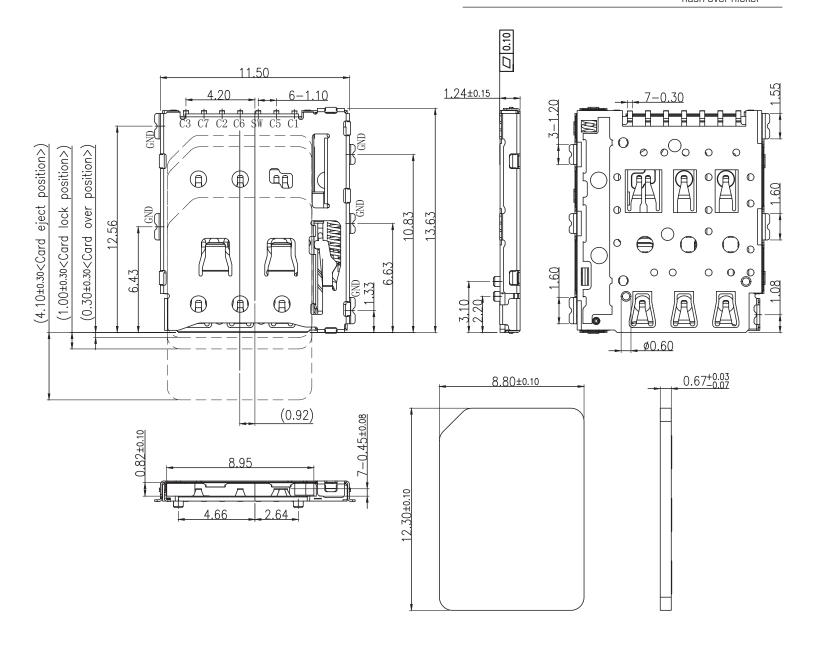


MECHANICAL DRAWING (CONTINUED)

units: mm

PCB tolerance: ±0.05 mm

| | PIN CONNECTIONS | | | |
|-----|------------------|---------------------|--|--|
| PIN | SIGNAL NAME | DESCRIPTION | | |
| C1 | VCC | SUPPLY VOLTAGE | | |
| C2 | RST | RESETTING | | |
| С3 | CLK | CLOCK | | |
| C5 | GND | GROUND CONNECTION | | |
| C6 | VPP | PROGRAMMING VOLTAGE | | |
| C7 | C7 I/O DATA LINE | | | |
| CD | - | CARD DETECT SWITCH | | |
| GND | - | COVER GROUND | | |

| CARD STATUS | | | | |
|----------------------------|---------|--|--|--|
| WITHOUT CARD CARD INSERTED | | | | |
| CD GND (C5) | CD (C5) | | | |

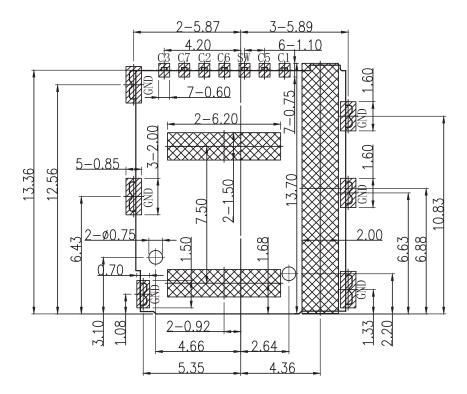

SMT SOLDER AREA

COPPER RESTRICTED AREA

1. TOUCH AREA OF CONTACT

TIPS NO ELECTRICAL FUNCTION

2. NO FIRST PCB_LAYOUT

CIRCUITS IN THE AREA


Recommended PCB Layout

Top View

PACKAGING

units: mm

Reel Size: Ø330 mm Reel QTY: 1,600 pcs per reel

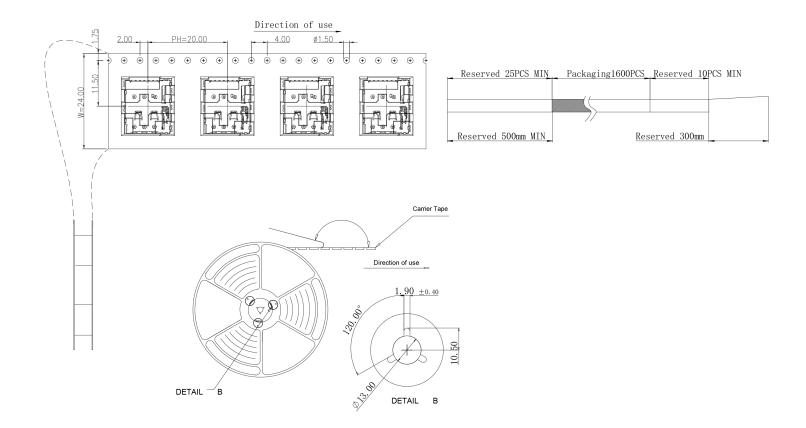

Additional Resources: Product Page

REVISION HISTORY

| rev. | description | date |
|------|-----------------|------------|
| 1.0 | initial release | 02/26/2025 |

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.