

Product Change Notice (PCN)

Date: **6/2/2023**

PCN Number: **PCN-0450571R-01**

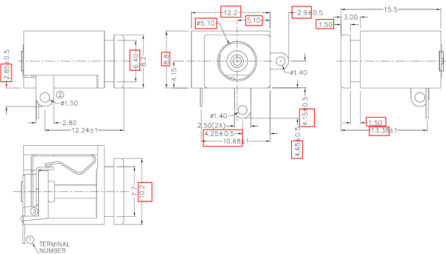
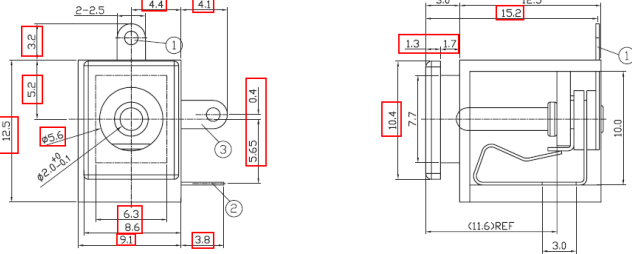
To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: PJ-008A

Reason(s) for Change: *Manufacturing process improvements*

Description of Change: *Mechanical, material, and electrical changes as shown below:*

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE																																																																																																																																																
																																																																																																																																																	
<table border="1"> <thead> <tr> <th></th> <th>MATERIAL</th> <th>PLATING</th> </tr> </thead> <tbody> <tr> <td>center pin</td> <td>copper</td> <td>nickel</td> </tr> <tr> <td>terminal 1</td> <td>brass</td> <td>tin</td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>tin</td> </tr> <tr> <td>terminal 3</td> <td>brass</td> <td>tin</td> </tr> <tr> <td>insulators</td> <td>PBT</td> <td></td> </tr> <tr> <td>plastic</td> <td>PBT</td> <td></td> </tr> </tbody> </table>		MATERIAL	PLATING	center pin	copper	nickel	terminal 1	brass	tin	terminal 2	copper alloy	tin	terminal 3	brass	tin	insulators	PBT		plastic	PBT		<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> </tr> </thead> <tbody> <tr> <td>center pin</td> <td>brass</td> <td>CuSn</td> </tr> <tr> <td>terminal 1</td> <td>brass</td> <td>silver</td> </tr> <tr> <td>terminal 2</td> <td>65 Mn steel</td> <td>CuSn</td> </tr> <tr> <td>terminal 3</td> <td>brass</td> <td>CuSn</td> </tr> <tr> <td>housing</td> <td>PBT (UL94V-0)</td> <td>black</td> </tr> </tbody> </table>	DESCRIPTION	MATERIAL	PLATING/COLOR	center pin	brass	CuSn	terminal 1	brass	silver	terminal 2	65 Mn steel	CuSn	terminal 3	brass	CuSn	housing	PBT (UL94V-0)	black																																																																																																									
	MATERIAL	PLATING																																																																																																																																															
center pin	copper	nickel																																																																																																																																															
terminal 1	brass	tin																																																																																																																																															
terminal 2	copper alloy	tin																																																																																																																																															
terminal 3	brass	tin																																																																																																																																															
insulators	PBT																																																																																																																																																
plastic	PBT																																																																																																																																																
DESCRIPTION	MATERIAL	PLATING/COLOR																																																																																																																																															
center pin	brass	CuSn																																																																																																																																															
terminal 1	brass	silver																																																																																																																																															
terminal 2	65 Mn steel	CuSn																																																																																																																																															
terminal 3	brass	CuSn																																																																																																																																															
housing	PBT (UL94V-0)	black																																																																																																																																															
<p>SPECIFICATIONS</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>rated input voltage</td> <td></td> <td></td> <td>24</td> <td></td> <td>Vdc</td> </tr> <tr> <td>rated input current</td> <td></td> <td></td> <td>0.5</td> <td></td> <td>A</td> </tr> <tr> <td>contact resistance</td> <td>between terminal and mating plug</td> <td></td> <td>50</td> <td></td> <td>mΩ</td> </tr> <tr> <td></td> <td>between terminal in a closed circuit</td> <td></td> <td>30</td> <td></td> <td>mΩ</td> </tr> <tr> <td>insulation resistance</td> <td>at 500 Vdc</td> <td>100</td> <td></td> <td></td> <td>MΩ</td> </tr> <tr> <td>voltage withstand</td> <td>at 50/60Hz for 1 minute</td> <td></td> <td>500</td> <td></td> <td>Vac</td> </tr> <tr> <td>insertion/withdrawal force</td> <td></td> <td>0.3</td> <td></td> <td>3</td> <td>kg</td> </tr> <tr> <td>operating temperature</td> <td></td> <td>-25</td> <td></td> <td>85</td> <td>°C</td> </tr> <tr> <td>life</td> <td></td> <td></td> <td>5,000</td> <td></td> <td>cycles</td> </tr> <tr> <td>flammability rating</td> <td>UL94V-0</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RoHS</td> <td>yes</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	parameter	conditions/description	min	typ	max	units	rated input voltage			24		Vdc	rated input current			0.5		A	contact resistance	between terminal and mating plug		50		mΩ		between terminal in a closed circuit		30		mΩ	insulation resistance	at 500 Vdc	100			MΩ	voltage withstand	at 50/60Hz for 1 minute		500		Vac	insertion/withdrawal force		0.3		3	kg	operating temperature		-25		85	°C	life			5,000		cycles	flammability rating	UL94V-0					RoHS	yes					<p>SPECIFICATIONS</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>rated input voltage</td> <td></td> <td></td> <td>24</td> <td></td> <td>Vdc</td> </tr> <tr> <td>rated input current</td> <td></td> <td></td> <td>0.5</td> <td></td> <td>A</td> </tr> <tr> <td>contact resistance</td> <td>between terminal and mating plug</td> <td></td> <td>100</td> <td></td> <td>mΩ</td> </tr> <tr> <td></td> <td>between terminal in a closed circuit</td> <td></td> <td>30</td> <td></td> <td>mΩ</td> </tr> <tr> <td>insulation resistance</td> <td>at 500 Vdc</td> <td>100</td> <td></td> <td></td> <td>MΩ</td> </tr> <tr> <td>voltage withstand</td> <td>for 1 minute</td> <td></td> <td>500</td> <td></td> <td>Vac</td> </tr> <tr> <td>insertion/withdrawal force</td> <td></td> <td>0.3</td> <td></td> <td>3</td> <td>kg</td> </tr> <tr> <td>operating temperature</td> <td></td> <td>-25</td> <td></td> <td>85</td> <td>°C</td> </tr> <tr> <td>life</td> <td></td> <td></td> <td>5,000</td> <td></td> <td>cycles</td> </tr> <tr> <td>flammability rating</td> <td>UL94V-0</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RoHS</td> <td>yes</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	parameter	conditions/description	min	typ	max	units	rated input voltage			24		Vdc	rated input current			0.5		A	contact resistance	between terminal and mating plug		100		mΩ		between terminal in a closed circuit		30		mΩ	insulation resistance	at 500 Vdc	100			MΩ	voltage withstand	for 1 minute		500		Vac	insertion/withdrawal force		0.3		3	kg	operating temperature		-25		85	°C	life			5,000		cycles	flammability rating	UL94V-0					RoHS	yes				
parameter	conditions/description	min	typ	max	units																																																																																																																																												
rated input voltage			24		Vdc																																																																																																																																												
rated input current			0.5		A																																																																																																																																												
contact resistance	between terminal and mating plug		50		mΩ																																																																																																																																												
	between terminal in a closed circuit		30		mΩ																																																																																																																																												
insulation resistance	at 500 Vdc	100			MΩ																																																																																																																																												
voltage withstand	at 50/60Hz for 1 minute		500		Vac																																																																																																																																												
insertion/withdrawal force		0.3		3	kg																																																																																																																																												
operating temperature		-25		85	°C																																																																																																																																												
life			5,000		cycles																																																																																																																																												
flammability rating	UL94V-0																																																																																																																																																
RoHS	yes																																																																																																																																																
parameter	conditions/description	min	typ	max	units																																																																																																																																												
rated input voltage			24		Vdc																																																																																																																																												
rated input current			0.5		A																																																																																																																																												
contact resistance	between terminal and mating plug		100		mΩ																																																																																																																																												
	between terminal in a closed circuit		30		mΩ																																																																																																																																												
insulation resistance	at 500 Vdc	100			MΩ																																																																																																																																												
voltage withstand	for 1 minute		500		Vac																																																																																																																																												
insertion/withdrawal force		0.3		3	kg																																																																																																																																												
operating temperature		-25		85	°C																																																																																																																																												
life			5,000		cycles																																																																																																																																												
flammability rating	UL94V-0																																																																																																																																																
RoHS	yes																																																																																																																																																

Affected Date Code: **5/30/2023**

F-723-001

Revision: A



Product Availability: *Channel Availability Q3*

Additional Information:

PCN Approval:

Operations/Quality

Rae D. Garcia

Product Management

RH
