



## Product Change Notice (PCN)

Date: **06/27/2024**

PCN Number: **PCN-0456757R**

To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: **SJ1-253X-SMT-TR Series (SJ1-2533-SMT-TR, SJ1-2534-SMT-TR & SJ1-2535-SMT-TR)**


Reason(s) for Change: **Manufacturing Improvement processes**

Description of Change: **New Factory Location. Product re-engineered for improved manufacturability and production yield. See image below for reference and check CUI Devices website for updated drawing. Cosmetic differences may be visible and not affect the form fit and function of the product.**

PREVIOUS CUI DEVICES DETAIL / IMAGE						NEW CUI DEVICES DETAIL / IMAGE																																																																																									
<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th colspan="3"></th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>copper alloy</td> <td>gold</td> <td colspan="3"></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>gold</td> <td colspan="3"></td> </tr> <tr> <td>terminal 3</td> <td>copper alloy</td> <td>gold</td> <td colspan="3"></td> </tr> <tr> <td>terminal 4</td> <td>copper alloy</td> <td>gold</td> <td colspan="3"></td> </tr> <tr> <td>terminal 5</td> <td>copper alloy</td> <td>gold</td> <td colspan="3"></td> </tr> <tr> <td>housing</td> <td><b>PAST</b> UL94V-0</td> <td>black</td> <td colspan="3"></td> </tr> </tbody> </table>						DESCRIPTION	MATERIAL	PLATING/COLOR				terminal 1	copper alloy	gold				terminal 2	copper alloy	gold				terminal 3	copper alloy	gold				terminal 4	copper alloy	gold				terminal 5	copper alloy	gold				housing	<b>PAST</b> UL94V-0	black				<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th colspan="3"></th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>copper alloy t=0.20</td> <td>gold over nickel</td> <td colspan="3"></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy t=0.20</td> <td>gold over nickel</td> <td colspan="3"></td> </tr> <tr> <td>terminal 3</td> <td>copper alloy t=0.20</td> <td>gold over nickel</td> <td colspan="3"></td> </tr> <tr> <td>terminal 4</td> <td>copper alloy t=0.20</td> <td>gold over nickel</td> <td colspan="3"></td> </tr> <tr> <td>terminal 5</td> <td>copper alloy t=0.20</td> <td>gold over nickel</td> <td colspan="3"></td> </tr> <tr> <td>housing</td> <td><b>PA10T</b> UL94V-0</td> <td>black</td> <td colspan="3"></td> </tr> </tbody> </table>						DESCRIPTION	MATERIAL	PLATING/COLOR				terminal 1	copper alloy t=0.20	gold over nickel				terminal 2	copper alloy t=0.20	gold over nickel				terminal 3	copper alloy t=0.20	gold over nickel				terminal 4	copper alloy t=0.20	gold over nickel				terminal 5	copper alloy t=0.20	gold over nickel				housing	<b>PA10T</b> UL94V-0	black			
DESCRIPTION	MATERIAL	PLATING/COLOR																																																																																													
terminal 1	copper alloy	gold																																																																																													
terminal 2	copper alloy	gold																																																																																													
terminal 3	copper alloy	gold																																																																																													
terminal 4	copper alloy	gold																																																																																													
terminal 5	copper alloy	gold																																																																																													
housing	<b>PAST</b> UL94V-0	black																																																																																													
DESCRIPTION	MATERIAL	PLATING/COLOR																																																																																													
terminal 1	copper alloy t=0.20	gold over nickel																																																																																													
terminal 2	copper alloy t=0.20	gold over nickel																																																																																													
terminal 3	copper alloy t=0.20	gold over nickel																																																																																													
terminal 4	copper alloy t=0.20	gold over nickel																																																																																													
terminal 5	copper alloy t=0.20	gold over nickel																																																																																													
housing	<b>PA10T</b> UL94V-0	black																																																																																													
<p><b>SOLDERABILITY</b></p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>lead storage</td> <td>10-30°C, &lt;75% humidity</td> <td></td> <td></td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering<sup>1</sup></td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td></td> <td>°C</td> </tr> <tr> <td>drying conditions<sup>2</sup></td> <td>parts to reflow: soak at 100°C for 4 hours parts removed from reflow: soak at 100°C for 4 hours</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>Notes: 1. CUI Devices recommends to solder within 70 hours from opening vacuum packaging at a temperature 10°C &amp; relative humidity 70%. 2. When assembling, see file by click here.</p> <p>* Time 25°C to Peak Temp. --- 8 Minutes Max. * Time within 5°C of Actual Peak Temp. --- 10-40 Seconds</p>						parameter	conditions/description	min	typ	max	units	lead storage	10-30°C, <75% humidity				°C	reflow soldering <sup>1</sup>	see reflow profile	255	260		°C	drying conditions <sup>2</sup>	parts to reflow: soak at 100°C for 4 hours parts removed from reflow: soak at 100°C for 4 hours					<p><b>SOLDERABILITY</b></p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>lead storage</td> <td>5-25°C, 20-75% humidity</td> <td></td> <td></td> <td></td> <td>°C</td> </tr> <tr> <td>reflow soldering</td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td></td> <td>°C</td> </tr> </tbody> </table> <p>Notes: 1. CUI Devices recommends usage of the product within 24 hours after 168h to opened. After 24 hours, CUI Devices recommends drying the parts prior to use.</p>						parameter	conditions/description	min	typ	max	units	lead storage	5-25°C, 20-75% humidity				°C	reflow soldering	see reflow profile	255	260		°C																																										
parameter	conditions/description	min	typ	max	units																																																																																										
lead storage	10-30°C, <75% humidity				°C																																																																																										
reflow soldering <sup>1</sup>	see reflow profile	255	260		°C																																																																																										
drying conditions <sup>2</sup>	parts to reflow: soak at 100°C for 4 hours parts removed from reflow: soak at 100°C for 4 hours																																																																																														
parameter	conditions/description	min	typ	max	units																																																																																										
lead storage	5-25°C, 20-75% humidity				°C																																																																																										
reflow soldering	see reflow profile	255	260		°C																																																																																										

F-723-001

Revision: A

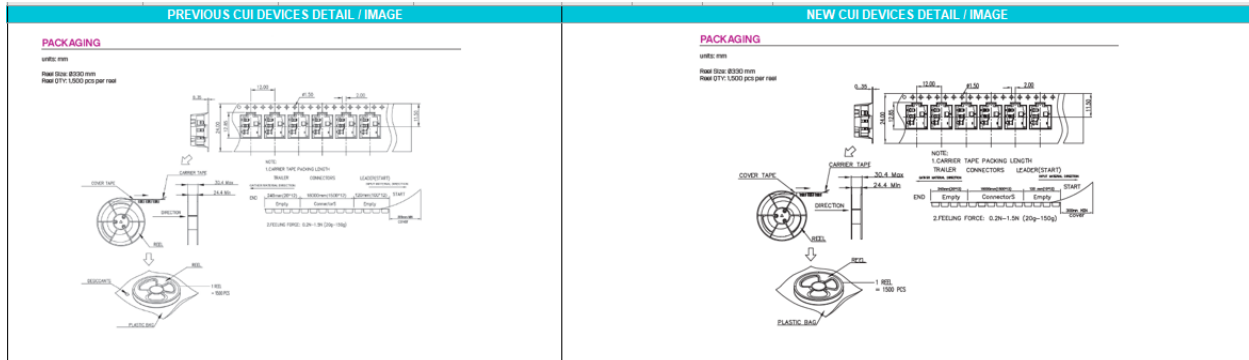

Affected Date Code: All orders placed after **05/15/2024**

Product Availability: *Pertaining to market availability*

PCN Approval:

Operations/Quality



Product Management

