

Additional Resources: Product Page | 3D Model

date 09/12/2024

page 1 of 3

MODEL: CPM-2C | DESCRIPTION: PELTIER COOLING UNIT

FEATURES

- arcTEC™ structure
- easy installation
- · tight seal structure for water resistance and absorption of thermal stress
- wide ∆T max
- precise temperature control





| MODEL | input | input | output | output |
|--------|------------|------------|----------------------|----------------------|
| | voltage¹ | current | Qmax² | ∆Tmax² |
| | max | max | T _h =50°C | T _h =50°C |
| | [V] | [A] | (W) | (°C) |
| CPM-2C | 12 | 7 | 43 | 85.9 |

- 1. at inverse voltage, "cold side plate" becomes hot side plate
- 2. maximum cooling capacity at I_{max} , V_{max} and ΔT =0°C 3. maximum temperature difference at I_{max} , V_{max} and I_{max} and I_{max} I_{max} and I_{max} I_{max}

SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|----------------------------------|------------------------|------|-----|------|-------|
| internal resistance ⁴ | | 1.48 | | 1.82 | Ω |
| cold side plate | | -20 | | 60 | °C |

4. measured by AC 4-terminal method at 25°C

SAFETY & COMPLIANCE


| parameter | conditions/description | min | typ | max | units |
|-----------------------|----------------------------|-----|-----|-------|-------|
| isolation voltage | for 1 second | | | 1,200 | Vac |
| insulation resistance | input to output at 250 Vdc | 10 | | | ΜΩ |
| RoHS | yes | | | | |


ENVIRONMENTAL

| parameter | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | | 0 | | 35 | °C |
| storage temperature | | -20 | | 70 | °C |
| operating humidity | | 30 | | 85 | % |
| storage humidity | | 10 | | 90 | % |

For further information and product selection refer to peltier applicaftion notes.pdf

CPM-2C PERFORMANCE (Th=50°C)

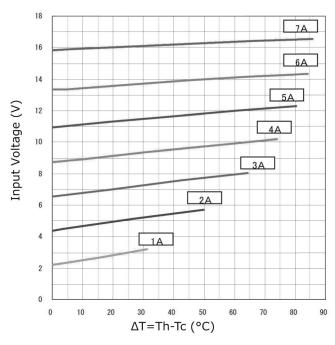


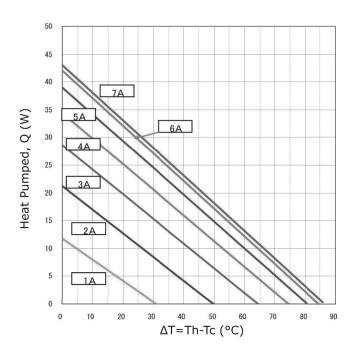


MECHANICAL

| parameter | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| weight | | | 220 | | g |
| cooling medium | aluminum | | | | |
| heat radiation medium | aluminum | | | | |

MECHANICAL DRAWING

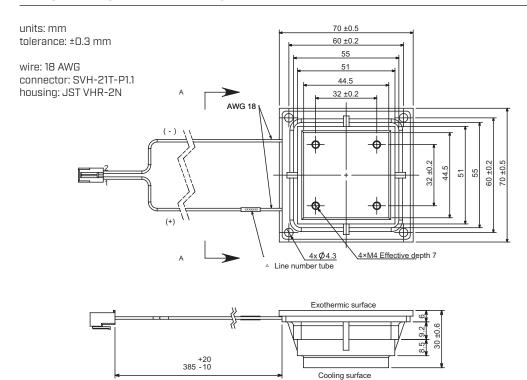



REVISION HISTORY

| rev. | description | date |
|------|-----------------------------------|------------|
| 1.0 | initial release | 11/07/2019 |
| 1.01 | logo, datasheet style update | 08/05/2022 |
| 1.02 | updated drawing | 09/27/2023 |
| 1.03 | CUI Devices rebranded to Same Sky | 09/12/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.